


# Verderair

## PD-P10



PD-P10

VERDERAIR

### Technical data PD-P10

Nominal port size	PD-P10 xx xx TN	3/8" NPT male
Air inlet		R 1/8"
Weight [kg]	PD-P10 EA xx TN	0,4
	PD-P10 EG xx TN	0,4
	PD-P10 TA xx TN	0,5
	PD-P10 TG xx TN	0,5
	PD-P10 GG xx TN	0,4
	PD-P10 UG xx TN	0,5
Max. operation pressure [Bar]		7
Max. operating temperature [°C]	PD-P10 EA or PD-P10 EG	70
	PD-P10 TA	100
	PD-P10 GG	70
	PD-P10 TG or PD-P10 UG	70

### CODE PD-P10 No.1 No.2 No.3 No.4

#### No.1 Liquid Housing

- E = Polyethylene (PE UHMW)
- G = Conductive Polyethylene (PE UHMW)
- T = PTFE
- U = Conductive PTFE

#### no.2 Air Section

- G = Conductive Polyethylene (PE UHMW)
- A = Polyamide

#### No.3 Diaphragm

- EO = EPDM Overmolded
- TO = PTFE Overmolded

#### No.4 Fluid Connection


- TN = NPT Threaded male

**Note: Not all combinations are available**

EXAMPLE PUMP TYPE

EXAMPLE : PD-P10EA EO TN

II 2GD c II B T70

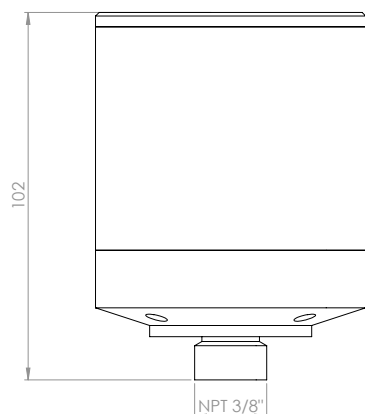

Dimensions in mm

