

Verderair VA-P08



VA-P08

VERDERAIR

Technical data VA-P08			
Nominal port size	Code No.6	TN	1/4" NPT[f]
Air inlet			R 1/8"
Weight [lbs]		VA-P08EE	2,4
		VA-P08GG	2,4
		VA-P08TT	5,5
		VA-P08UU	5,1
Max. operation pressure [PSI]			102
Max. operating temperature [°F]		VA-P08EE or VA-P08GG	158
		VA-P08TT or VA-P08UU	212
Max. size pumpable solids [inch]	Code No.3	EP or TF or SS	0,09
		CV	/
Max. Suction lift dry [Feet Wc]	Code No.3	EP or TF or SS	1,6
		CV	3,3
Max. Suction lift wet [Feet Wc]	Code No.3	EP or TF or SS	29,5
		CV	29,5

CODE VA-P08 No.1 No.2 No.3 No.4 No.5 No.6

No.1 Housing & Center Section/ No.2 Valve seat

- EE EE = Polyethylene (PE UHMW)
- ⚠ GG GG = Conductive Polyethylene (PE UHMW)
- TT TT = PTFE
- ⚠ UU UU = Conductive PTFE

No.3 Valve balls

- EP = EPDM
- TF = PTFE
- SS = SS 316
- CV = Cylinder Valve

No.4 Diaphragms

- EO = EPDM Overmolded
- TO = PTFE Overmolded

No.5 Fluid connections

- TN = NPT Threated female

No.6 Options

- OO = Standard, no option
- RE = Remote
- PD = Ready for Pulsation Dampener
- VS = Vertical Suction

⚠ II 2GD c II B Tx

EXAMPLE PUMP TYPE


EXAMPLE : VA-P08EE EE TF TO TN OO



Verderair VA-P08



VA-P08

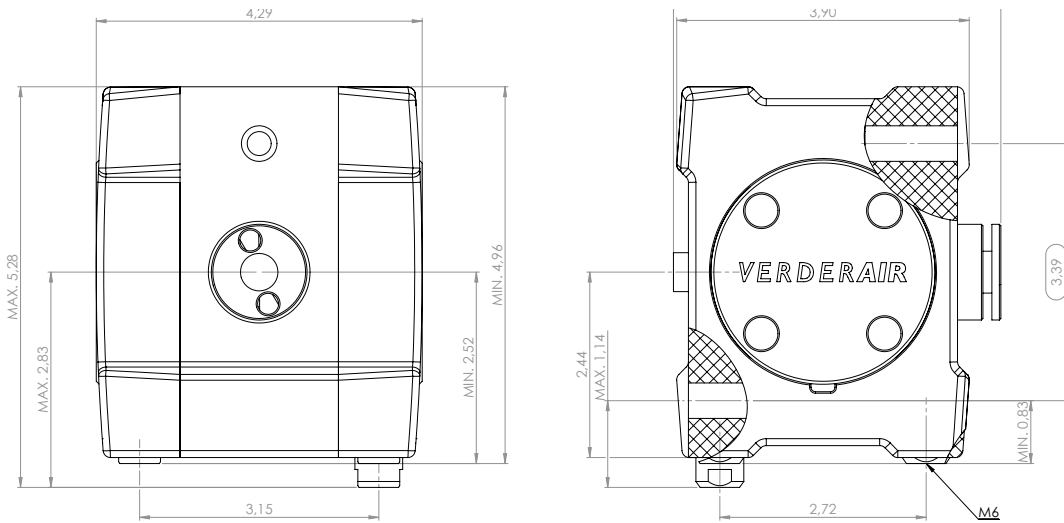

Dimensions in inches

Measured with water of 68°F

