

# Verderair VA-P25





VA-P25

VERDERAIR

Technical data VA-P25			
Nominal port size	Code No.6	TN	1" NPT[f]
		FD	DN25
		FA	1"
		FJ	1"
Air inlet			R 1/4"
Weight [lbs]		VA-P25EE	33
		VA-P25GG	31
		VA-P25TT	75
		VA-P25UU	71
Max. operation pressure [PSI]			102
Max. operating temperature [°F]		VA-P25EE or VA-P25GG	158
		VA-P25TT or VA-P25UU	248
Max. size pumpable solids [inch]	Code No.3	EP or TF or SS	0,16
		CV	/
Max. Suction lift dry [Feet Wc]	Code No.3	EP or TF or SS	9,8
		CV	13,1
Max. Suction lift wet [Feet Wc]	Code No.3	EP or TF or SS	31,2
		CV	31,2

## CODE VA-P40 No.1 No.2 No.3 No.4 No.5 No.6

### No.1 Housing & Center Section/ No.2 Valve seat

- EE EE = Polyethylene (PE UHMW)
-  GG GG = Conductive Polyethylene (PE UHMW)
- TT TT = PTFE
-  UU UU = Conductive PTFE

### No.3 Valve balls

- EP = EPDM
- TF = PTFE
- CV = Cylinder Valve

### No.4 Diaphragms

- EO = EPDM Overmolded
- TO = PTFE Overmolded

### No.5 Fluid connections

- TN = NPT Threaded female
- FD = Flanged DIN
- FA = Flanged Ansi
- FJ = Flanged JIS

### No.6 Options

- OO = Standard, no option
- RE = Remote
- PD = Ready for Pulsation Dampener
- VS = Vertical Suction
- BS = Barrier system with Sensors only
- LS = Leak detection, Sensor only
- SS = Stroke Sensor
- DM = Draining Manual
- DP = Draining Pneumatical
- AP = ANSI Prepared

 II 2GD c II B Tx


#### EXAMPLE PUMP TYPE

EXAMPLE : VA-P25EE EE TF TO TN OO



# Verderair VA-P25

VA-P25

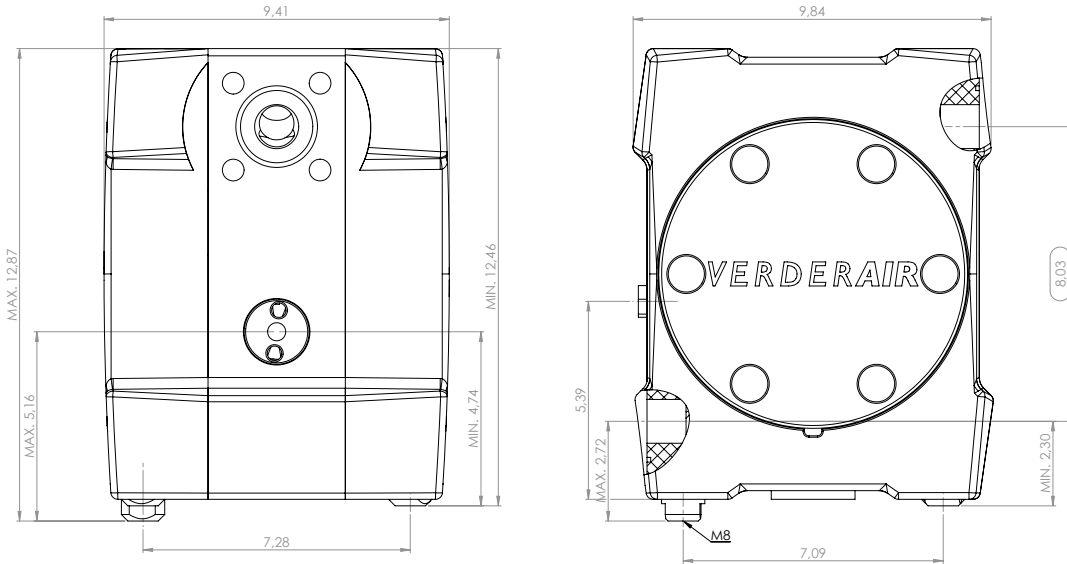

Dimensions in inches

Measured with water of 68°F

